


EBC005



Splitter box

ZDO6H050MSS0000-00STAK120MSS

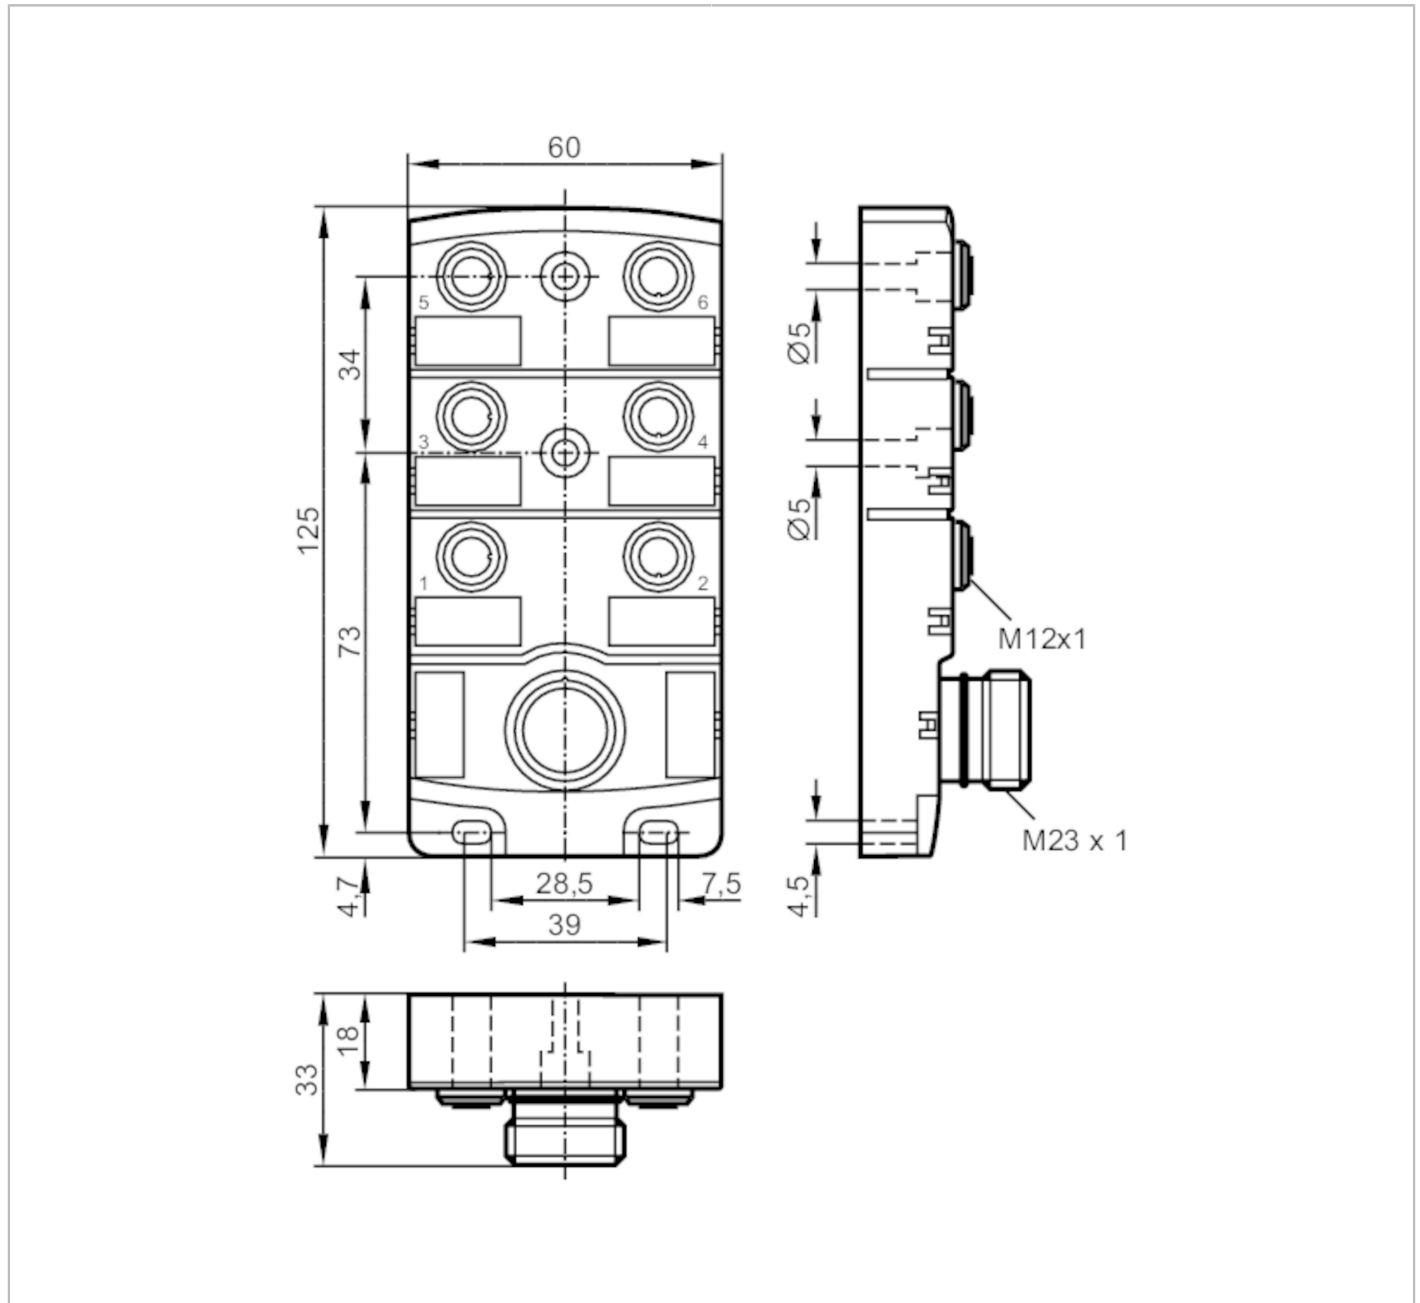

Application	
Special feature	Free from silicone; Gold-plated contacts
Free from silicone	yes
Electrical data	
Operating voltage [V]	< 30 AC/DC; ("supply class 2" to cULus)
Max. current load per module/slot [A]	4
Max. current load total [A]	12

EBC005



Splitter box

ZDO6H050MSS0000-00STAK120MSS

Operating conditions

Ambient temperature	[°C]	-25...80
Protection		IP 67

Tests / approvals

UL approval	Enclosure type	Type 1
-------------	----------------	--------

Mechanical data

Weight	[g]	241.5
Materials		PA
Moulded-body material		PA / PA
Number of ports splitter box		6
Connector type		M12

Accessories


Items supplied	Protective caps: 2 labels: 6
----------------	---------------------------------

Remarks

Pack quantity	1 pcs.
---------------	--------

Electrical connection - Connection

Connector: 1 x M23; Moulded body: PA; Contacts: gold-plated; Tightening torque: 0.8...1.5 Nm




EBC005



Splitter box

ZDO6H050MSS0000-00STAK120MSS

Connection

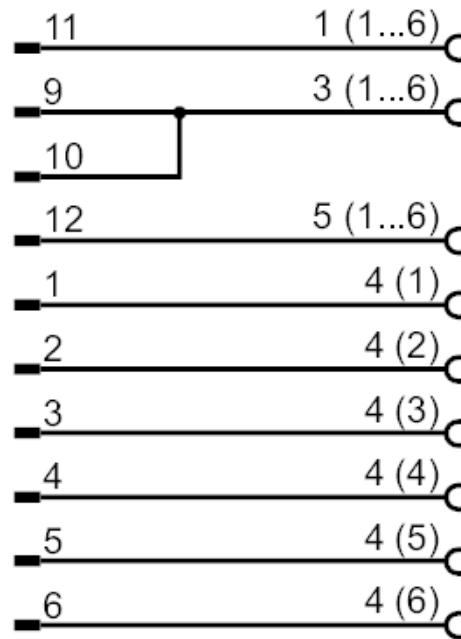

Electrical connection - slot

Connector: 6 x M12; Moulded body: PA; Contacts: gold-plated; Tightening torque: 0.8...1.5 Nm

