




Splitter box

ZDO6H050MSS0000-00STAK190MSS

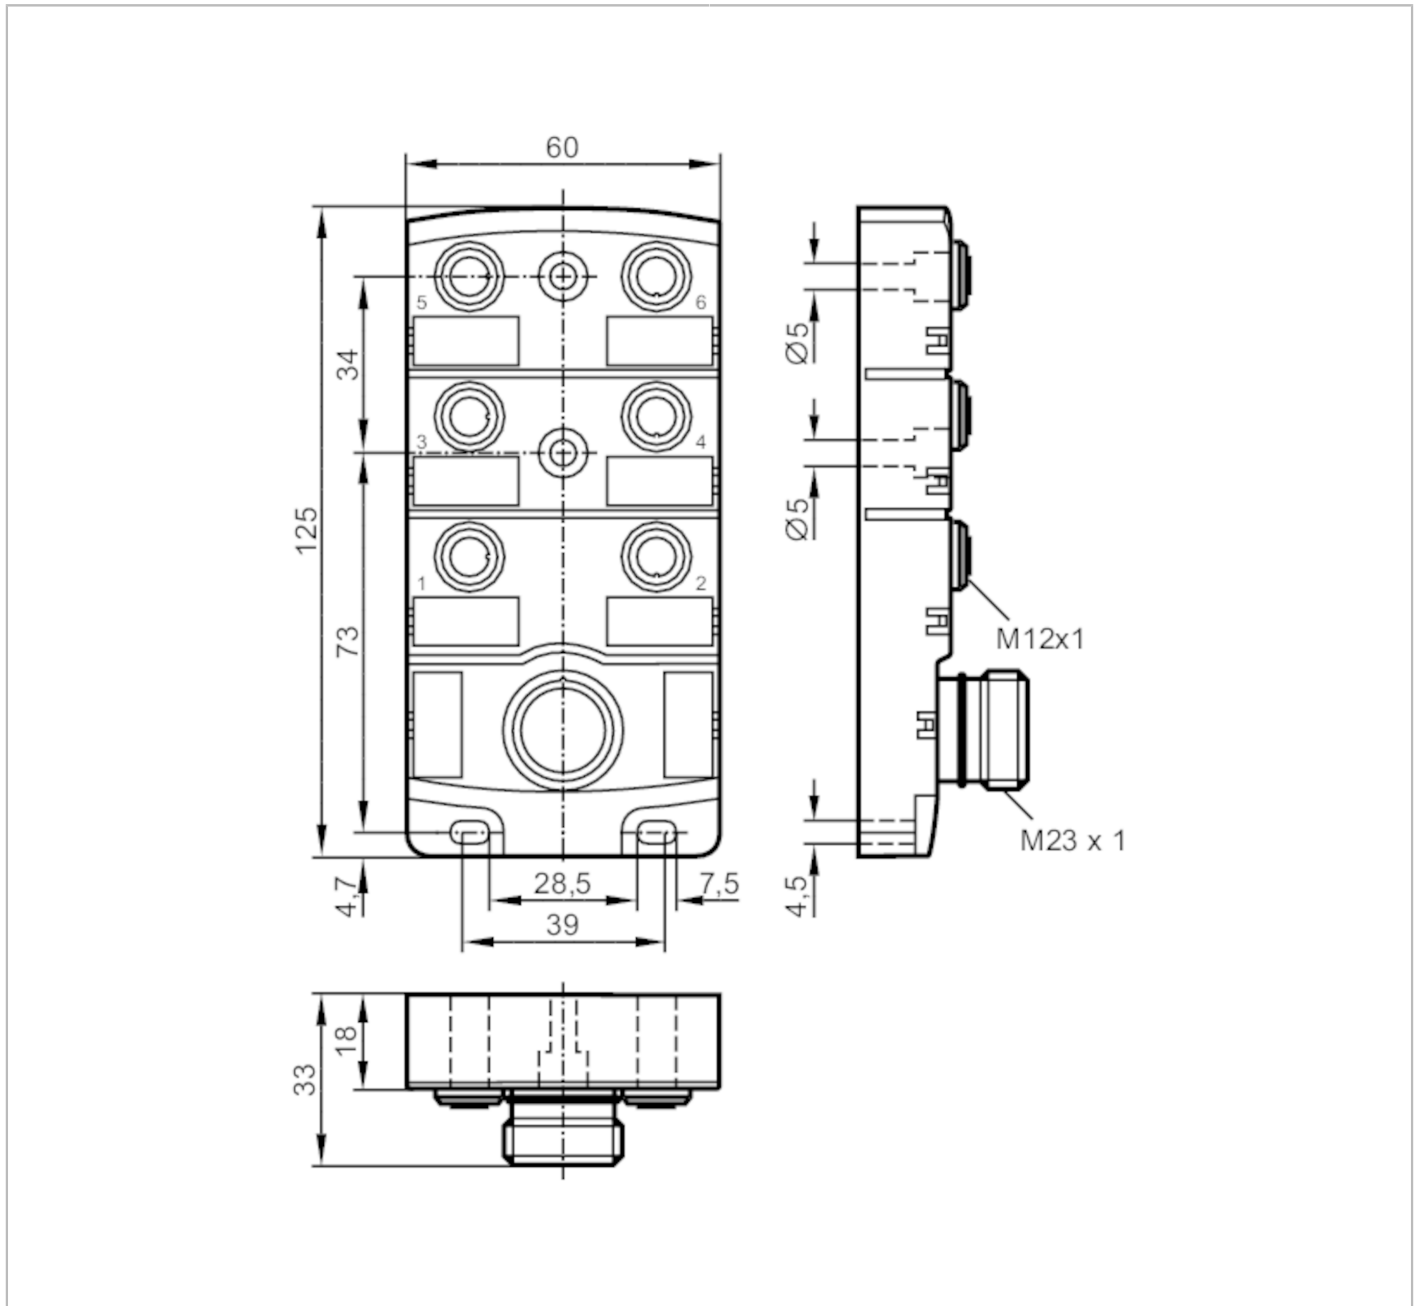

Application

Special feature	Free from silicone; Gold-plated contacts
Free from silicone	yes

Electrical data

Operating voltage	[V]	< 30 AC/DC; ("supply class 2" to cULus)
Max. current load per module/slot	[A]	4
Max. current load total	[A]	12

EBC007



Splitter box

ZDO6H050MSS0000-00STAK190MSS

Operating conditions		
Ambient temperature [°C]	-25...80	
Protection	IP 67	
Tests / approvals		
UL approval	Enclosure type	Type 1
Mechanical data		
Weight [g]	252.5	
Materials	PA	
Moulded-body material	PA / PA	
Number of ports splitter box	6	
Connector type	M12	
Accessories		
Items supplied	Protective caps: 2 labels: 6	
Remarks		
Pack quantity	1 pcs.	
Electrical connection - Connection		
Connector: 1 x M23; Moulded body: PA; Contacts: gold-plated; Tightening torque: 0.8...1.5 Nm		



Splitter box

ZDO6H050MSS0000-00STAK190MSS

Connection

+	19	1 (1...6)	C
-	6	3 (1...6)	C
⊕	12	5 (1...6)	C
	15	4 (1)	C
	7	2 (1)	C
	5	4 (2)	C
	4	2 (2)	C
	16	4 (3)	C
	8	2 (3)	C
	3	4 (4)	C
	14	2 (4)	C
	17	4 (5)	C
	9	2 (5)	C
	2	4 (6)	C
	13	2 (6)	C

Electrical connection - slot

Connector: 6 x M12; Moulded body: PA; Contacts: gold-plated; Tightening torque: 0.8...1.5 Nm

