


EBC011



Splitter box

ZDO8H050MSS0000-00STAK190MSS

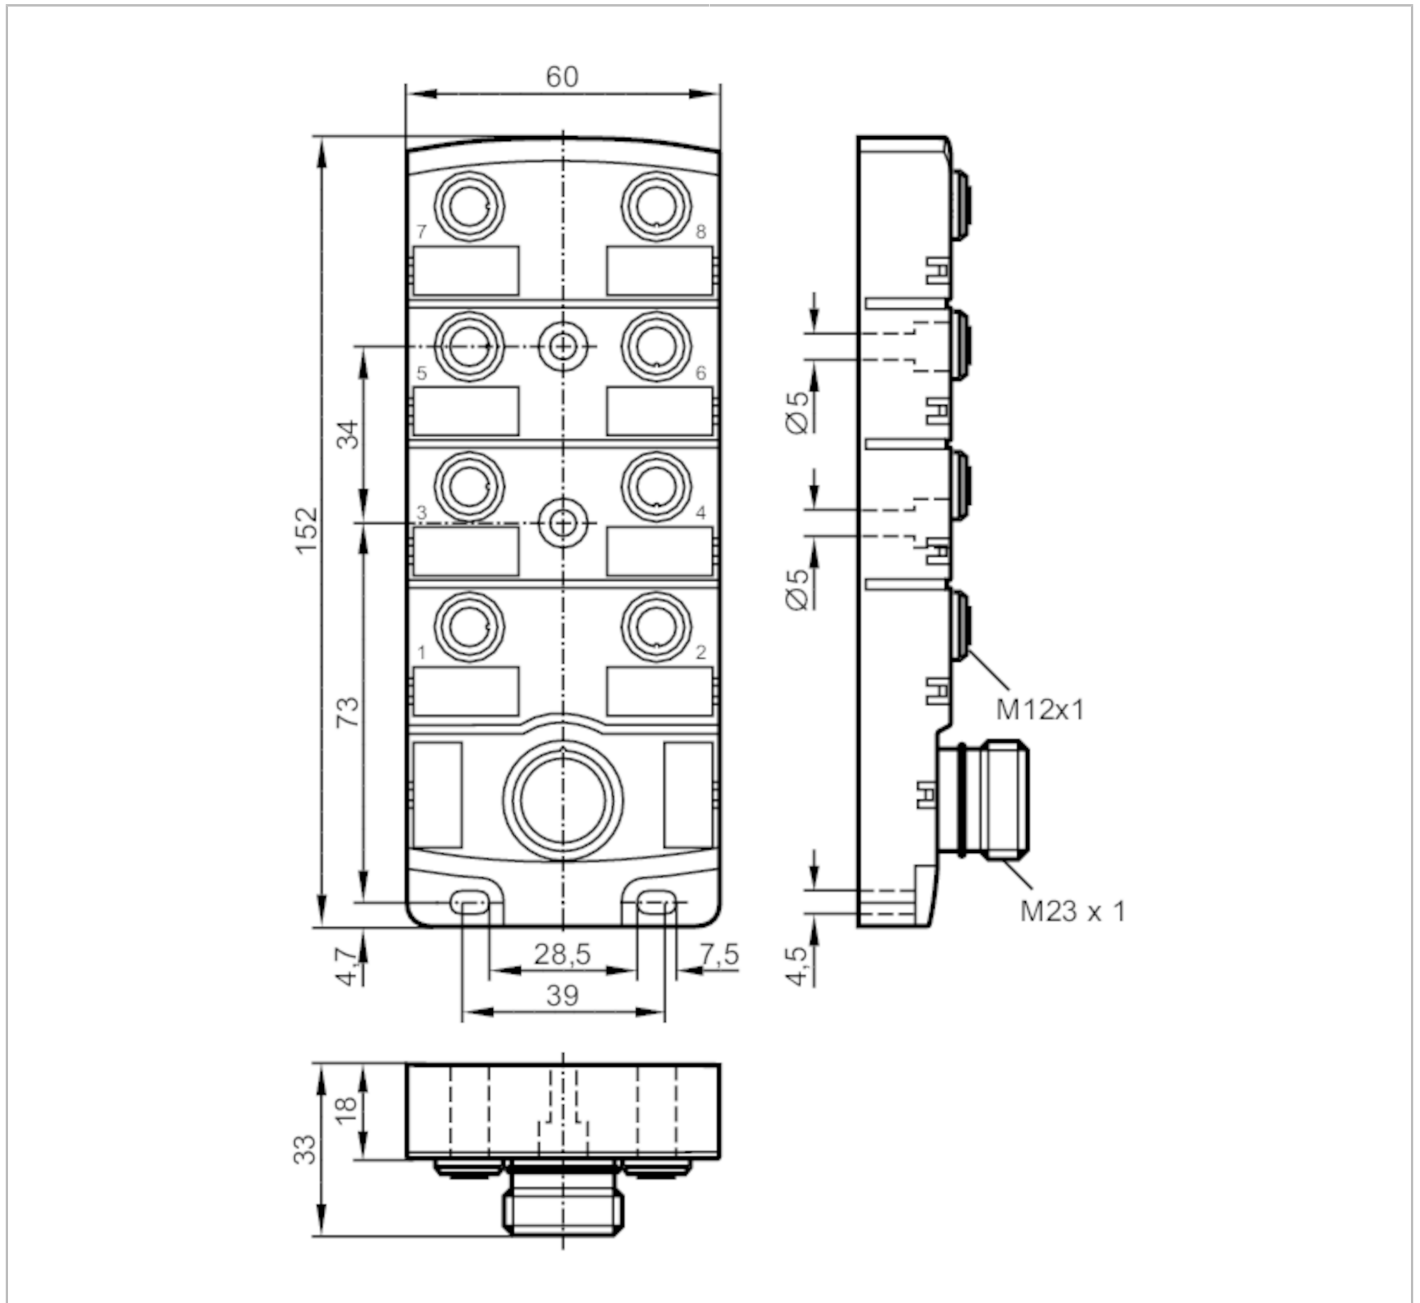

Application	
Special feature	Free from silicone; Gold-plated contacts
Free from silicone	yes
Electrical data	
Operating voltage [V]	< 30 AC/DC; ("supply class 2" to cULus)
Max. current load per module/slot [A]	4
Max. current load total [A]	10



Splitter box

ZDO8H050MSS0000-00STAK190MSS

Operating conditions		
Ambient temperature	[°C]	-25...80
Protection		IP 67
Tests / approvals		
UL approval	Enclosure type	Type 1
Mechanical data		
Weight	[g]	303.5
Dimensions	[mm]	33 x 60 x 152
Materials		PA
Moulded-body material		PA / PA
Number of ports splitter box		8
Connector type		M12
Accessories		
Items supplied		Protective caps: 2 labels: 8
Remarks		
Pack quantity		1 pcs.
Electrical connection - Connection		
Connector: 1 x M23; Moulded body: PA; Contacts: gold-plated; Tightening torque: 0.8...1.5 Nm		



Splitter box

ZDO8H050MSS0000-00STAK190MSS

Connection

+ 19	1 (1...8) _C
- 6	3 (1...8) _C
⏚ 12	5 (1...8) _C
15	4 (1) _C
7	2 (1) _C
5	4 (2) _C
4	2 (2) _C
16	4 (3) _C
8	2 (3) _C
3	4 (4) _C
14	2 (4) _C
17	4 (5) _C
9	2 (5) _C
2	4 (6) _C
13	2 (6) _C
11	4 (7) _C
10	2 (7) _C
1	4 (8) _C
18	2 (8) _C

Electrical connection - slot

Connector: 8 x M12; Moulded body: PA; Contacts: gold-plated; Tightening torque: 0.8...1.5 Nm

