


SIMATIC S7-300 IO-Module Bundle Consisting of: Digital output S7-300 SM 322 (6ES7322-1BH01-0AA0), 1x front connector (6ES7392-1AJ00-0AA0) with screw contacts, 20-pole

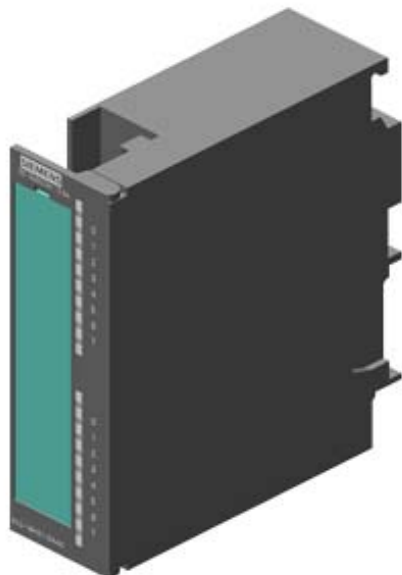

| Power loss | |
|--------------------------------------------------------------------------------|-----------------|
| Power loss, typ. | 4.9 W |
| Digital outputs | |
| Number of digital outputs | 16 |
| Short-circuit protection | Yes; Electronic |
| Output current | |
| <ul style="list-style-type: none"> • for signal "1" rated value | 0.5 A |
| Output delay with resistive load | |
| <ul style="list-style-type: none"> • "0" to "1", max. | 100 μ s |
| <ul style="list-style-type: none"> • "1" to "0", max. | 500 μ s |
| Dimensions | |
| Width | 40 mm |
| Height | 125 mm |
| Depth | 120 mm |
| last modified: | 10/09/2020 |