
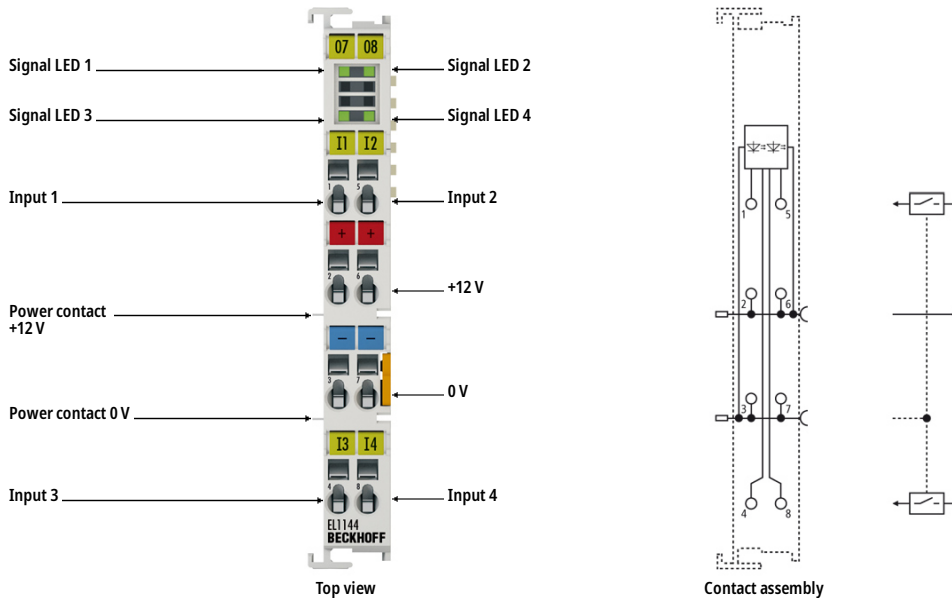


# EL1144 | EtherCAT Terminal, 4-channel digital input, 12 V DC, 10 $\mu$ s



**i Product status:** Regular delivery

The EL1144 digital input terminal acquires the binary 12 V control signals from the process level and transmits them, in an electrically isolated form, to the higher-level automation unit. The EtherCAT Terminal has four channels that indicate their signal state via light emitting diodes. The 12 V supply voltage can be generated with the EL9512 power supply terminal, and fed into the power contacts.

Special features:

- 12 V inputs
- low delay due to fast 10  $\mu$ s input filter
- usable, for example, for inductive or capacitive sensors
- +12 V and 0 V sensor supply connections

## Product information

### Technical Data

Technical data	EL1144, ES1144
Connection technology	2-/3-wire
Number of inputs	4
Nominal voltage	12 V DC
"0" signal voltage	< 2.4 V
"1" signal voltage	> 8.5 V

Input current	typ. 3.0 mA
Input filter	typ. 10 µs
Distributed clocks	–
Current consumption power contacts	typ. 14 mA + load
Current consumption E-bus	typ. 90 mA
Electrical isolation	500 V (E-bus/field potential)
Configuration	no address or configuration setting
Weight	approx. 55 g
Operating/storage temperature	0...+55 °C/-25...+85 °C
Relative humidity	95 %, no condensation
Vibration/shock resistance	conforms to EN 60068-2-6/EN 60068-2-27
EMC immunity/emission	conforms to EN 61000-6-2/EN 61000-6-4
Protect. rating/installation pos.	IP20/variable
Pluggable wiring	for all ESxxx terminals
Approvals/markings	CE, UL, ATEX
Ex marking	II 3 G Ex nA IIC T4 Gc

Housing data	EL-12-8pin	ES-12-8pin
Design form	compact terminal housing with signal LEDs	terminal housing with pluggable wiring level
Material	polycarbonate	
Dimensions (W x H x D)	12 mm x 100 mm x 68 mm	
Installation	on 35 mm DIN rail, conforming to EN 60715 with lock	
Side by side mounting by means of	double slot and key connection	
Marking	labeling of the BZxxx series	
Wiring	solid conductor (e), flexible conductor (f) and ferrule (a): spring actuation by screwdriver	
Connection cross-section	s*: 0.08...2.5 mm <sup>2</sup> , st*: 0.08...2.5 mm <sup>2</sup> , f*: 0.14...1.5 mm <sup>2</sup>	s*: 0.08...1.5 mm <sup>2</sup> , st*: 0.08...1.5 mm <sup>2</sup> , f*: 0.14...1.5 mm <sup>2</sup>
Connection cross-section AWG	s*: AWG 28...14, st*: AWG 28...14, f*: AWG 26...16	s*: AWG 28...16, st*: AWG 28...16, f*: AWG 26...16
Stripping length	8...9 mm	9...10 mm
Current load power contacts	I <sub>max</sub> : 10 A	

\*s: solid wire; st: stranded wire; f: with ferrule

## Ordering Information

### Ordering information

EL1144	EtherCAT Terminal, 4-channel digital input, 12 V DC, 10 $\mu$ s
ES1144	EtherCAT Terminal, 4-channel digital input, 12 V DC, 10 $\mu$ s, pluggable wiring

---