
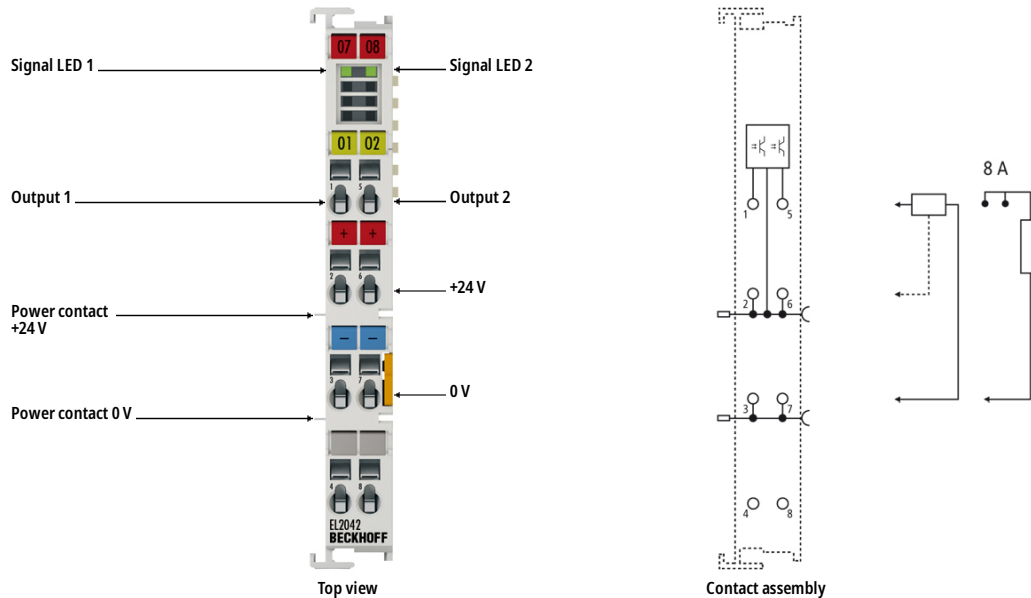


EL2042 | EtherCAT Terminal, 2-channel digital output, 24 V DC, 2 x 4 A/1 x 8 A



i Product status: Regular delivery

The EL2042 digital output terminal connects binary 24 V DC control signals to the actuators with electrical isolation. Each EtherCAT Terminal contains two channels whose signal state is indicated by LEDs. The EL2042 enables connection of loads with current consumption up to 8 A if the outputs are connected in parallel. Two 3-wire actuators can be connected directly to the EL2042.

Special features:

- Connection of different load types possible (ohmic, inductive, lamp load)
- Max. output current of 4 A per channel or 8 A with parallel connection
- Short-circuit-proof outputs and reverse polarity protection

Product information

Technical Data

Technical data	EL2042, ES2042
Connection technology	3-wire
Number of outputs	2
Nominal voltage	24 V DC (-15 %/+20 %)
Load type	ohmic, inductive, lamp load
Distributed clocks	–
Max. output current	4.0 A (short-circuit proof) per channel, 8 A for parallel connection

Short-circuit current	typ. < 70 A
Reverse voltage protection	yes
Breaking energy	< 1.7 J/channel
Switching times	typ. TON: 40 µs, typ. TOFF: 200 µs
Current consumption E-bus	typ. 120 mA
Electrical isolation	500 V (E-bus/field potential)
Current consumption power contacts	typ. 15 mA + load
Bit width in the process image	2 outputs
Configuration	no address or configuration setting
Weight	approx. 55 g
Operating/storage temperature	0...+55 °C/-25...+85 °C
Relative humidity	95 %, no condensation
Vibration/shock resistance	conforms to EN 60068-2-6/EN 60068-2-27
EMC immunity/emission	conforms to EN 61000-6-2/EN 61000-6-4
Protect. rating/installation pos.	IP20/variable
Pluggable wiring	for all ESxxx terminals
Approvals/markings	CE

Housing data	EL-12-8pin	ES-12-8pin
Design form	compact terminal housing with signal LEDs	terminal housing with pluggable wiring level
Material	polycarbonate	
Dimensions (W x H x D)	12 mm x 100 mm x 68 mm	
Installation	on 35 mm DIN rail, conforming to EN 60715 with lock	
Side by side mounting by means of	double slot and key connection	
Marking	labeling of the BZxxx series	
Wiring	solid conductor (e), flexible conductor (f) and ferrule (a): spring actuation by screwdriver	
Connection cross-section	s*: 0.08...2.5 mm ² , st*: 0.08...2.5 mm ² , f*: 0.14...1.5 mm ²	s*: 0.08...1.5 mm ² , st*: 0.08...1.5 mm ² , f*: 0.14...1.5 mm ²
Connection cross-section AWG	s*: AWG 28...14, st*: AWG 28...14, f*: AWG 26...16	s*: AWG 28...16, st*: AWG 28...16, f*: AWG 26...16
Stripping length	8...9 mm	9...10 mm
Current load power contacts	I _{max} : 10 A	

*s: solid wire; st: stranded wire; f: with ferrule

Ordering Information

Ordering information

EL2042	EtherCAT Terminal, 2-channel digital output, 24 V DC, 2 x 4 A/1 x 8 A
ES2042	EtherCAT Terminal, 2-channel digital output, 24 V DC, 2 x 4 A/1 x 8 A, pluggable wiring
