


# EL6731 | EtherCAT Terminal, 1-channel communication interface, PROFIBUS, master/slave

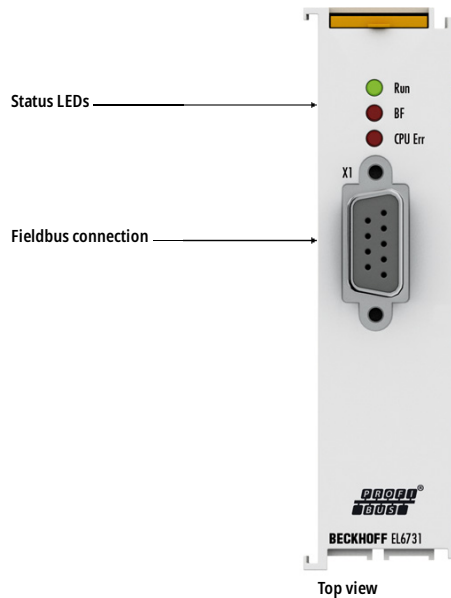

## **i** Product status: Regular delivery

The PROFIBUS master terminal EL6731 supports the PROFIBUS protocol with all its features. Within an EtherCAT Terminal network, it enables the integration of any PROFIBUS devices. Thanks to the PROFIBUS chip developed in-house, the terminal is equipped with the latest version of the PROFIBUS technology – including high-precision isochronous mode for axis control and expanded diagnostic options. These masters are the only ones that support different poll rates for the slaves. Features:

- Cycle times from 200  $\mu$ s are possible.
- PROFIBUS DP, PROFIBUS DP-V1, PROFIBUS DP-V2
- master and slave up to 12 Mbit/s
- powerful parameter and diagnostics interfaces
- The error management for each bus user is freely configurable.
- It is possible to read the bus configuration and automatically assign the “GSD” files.

Like the FC3101 PROFIBUS PCI card, the EL6731 can be used for connection to PROFIBUS networks. The terminal, however, enables a more space-saving implementation since no PCI slots are required in the Industrial PC.

## Product information

### Technical data

Technical data	EL6731
Technology	PROFIBUS master/slave terminal
Cycle time	differing DP cycle times per slave are possible using the CDL concept

Fieldbus	PROFIBUS DP (standard), PROFIBUS DP-V1 (Cl. 1+2: acyclic services, alarms), DP-V2, PROFIBUS MC (equidistant)
Number of fieldbus channels	1
Data transfer rates	9.6 kbaud...12 Mbaud
Interfaces	1 x D-sub socket, 9-pin, galvanically decoupled
Bus device	max. 125 slaves with up to 244 bytes input, output, parameter, configuration or diagnostic data per slave
Hardware diagnostics	status LEDs
Distributed clocks	yes
Bit width in the process image	total max.: 1.4 kbyte input and 1.4 kbyte output data
Current consumption power contacts	–
Current consumption E-bus	typ. 200 mA
Weight	approx. 70 g
Operating/storage temperature	-25...+60 °C/-40...+85 °C
Relative humidity	95 %, no condensation
Vibration/shock resistance	conforms to EN 60068-2-6/EN 60068-2-27
EMC immunity/emission	conforms to EN 61000-6-2/EN 61000-6-4
Protect. rating/installation pos.	IP20/variable
Approvals/markings	CE, UL, ATEX
Ex marking	II 3 G Ex nA IIC T4 Gc

<b>Housing data</b>	<b>EL-24</b>
Design form	compact terminal housing with signal LEDs
Material	polycarbonate
Dimensions (W x H x D)	24 mm x 100 mm x 52 mm
Installation	on 35 mm DIN rail, conforming to EN 60715 with lock
Side by side mounting by means of	double slot and key connection
Marking	–
Wiring	specific push-in connection