


# EL9100 | Potential supply terminal, 24 V DC

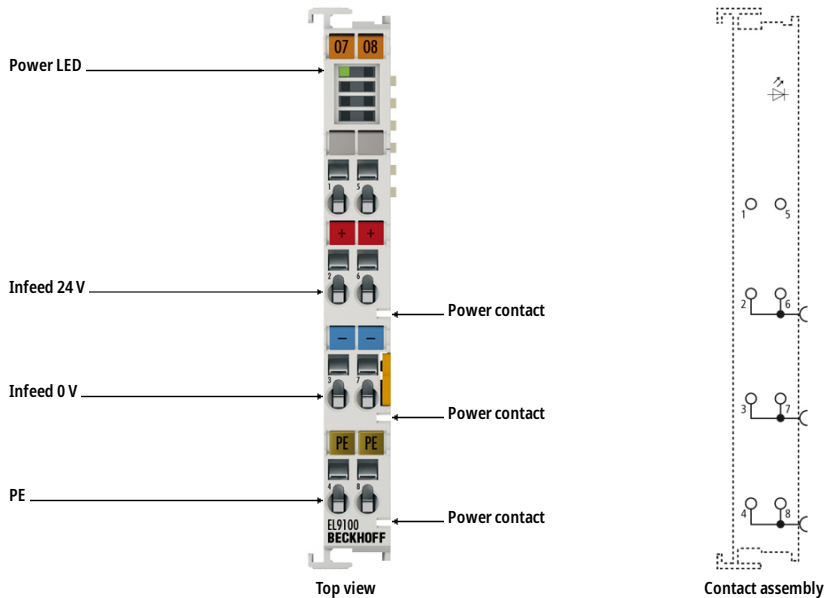

**i** **Product status:** Regular delivery

The EL9100 potential feed terminal enables the setup of different potential groups with the standard voltage 24 V DC. The supply voltage is taken up via the front terminal contacts and passed through to the adjacent terminals via the internal power contacts. The E-bus is passed through in the usual way to the adjacent terminal. A Power LED indicates the operating state.

## Product information

### Technical data

Technical data	EL9100, ES9100
Technology	potential supply terminal
Current load	≤ 10 A
Power LED	green
Renewed infeed	yes
Nominal voltage	24 V DC
Electrical isolation	500 V (E-bus/field potential)
PE contact	yes
Connection facility to additional power contact	1
Bit width in the process image	0

Housing width	12 mm
Side by side mounting on EtherCAT Terminals with power contact	yes
Side by side mounting on EtherCAT Terminals without power contact	yes
Weight	approx. 50 g
Operating/storage temperature	-25...+60 °C/-40...+85 °C
Pluggable wiring	for all ESxxx terminals
Approvals/markings	CE, UL, ATEX
Ex marking	II 3 G Ex nA IIC T4 Gc

Housing data	EL-12-8pin	ES-12-8pin
Design form	compact terminal housing with signal LEDs	terminal housing with pluggable wiring level
Material	polycarbonate	
Dimensions (W x H x D)	12 mm x 100 mm x 68 mm	
Installation	on 35 mm DIN rail, conforming to EN 60715 with lock	
Side by side mounting by means of	double slot and key connection	
Marking	labeling of the BZxxx series	
Wiring	solid conductor (e), flexible conductor (f) and ferrule (a): spring actuation by screwdriver	
Connection cross-section	s*: 0.08...2.5 mm <sup>2</sup> , st*: 0.08...2.5 mm <sup>2</sup> , f*: 0.14...1.5 mm <sup>2</sup>	s*: 0.08...1.5 mm <sup>2</sup> , st*: 0.08...1.5 mm <sup>2</sup> , f*: 0.14...1.5 mm <sup>2</sup>
Connection cross-section AWG	s*: AWG 28...14, st*: AWG 28...14, f*: AWG 26...16	s*: AWG 28...16, st*: AWG 28...16, f*: AWG 26...16
Stripping length	8...9 mm	9...10 mm
Current load power contacts	I <sub>max</sub> : 10 A	

\*s: solid wire; st: stranded wire; f: with ferrule

## Ordering information

Ordering information	
EL9100	Passive potential feed terminal, 24 V DC
ES9100	Potential supply terminal, 24 V DC, pluggable wiring