

Price* : 707.25 USD



Main

Range of product	Modicon Premium Automation platform
Product or component type	Discrete input module
Discrete input number	16 resistive isolated 16 resistive isolated conforming to EN/IEC 61131-2 type 2
Discrete input voltage	24 V AC 24 V DC negative
Network frequency	50/60 Hz 47...63 Hz AC
Sensor power supply	19...30 V DC 20...26 V AC
Input compatibility	With 2-wire/3-wire proximity sensors conforming to EN/IEC 60947-5-2
Discrete input current	15 mA AC 16 mA DC

Complementary

Voltage state 1 guaranteed	<= 10 V DC 10 V AC
Current state 1 guaranteed	>= 6.5 mA DC 6 mA AC
Voltage state 0 guaranteed	>= 19 V DC 5 V AC
Current state 0 guaranteed	<= 2 mA DC 4 mA AC
Input impedance	1600 Ohm at state 1
Response time	4 ms <= 7 ms
Insulation resistance	< 10 MOhm 500 V DC
Power dissipation	(1 W + 0.4 W x No of channels used) DC 0.89 W AC
Electrical connection	Screw terminal

Marking	CE
Current consumption	135 mA 24 V DC
Module format	Standard
Product weight	0.68 lb(US) (0.31 kg)

Environment

Dielectric strength	1500 V AC at 50/60 Hz
Standards	UL 508 CSA C22.2 No 213 Class I Division 2 Group A 89/336/EEC CSA C22.2 No 142 93/68/EEC IEC 60664 CSA C22.2 No 213 Class I Division 2 Group B EN/IEC 61131-2 CSA C22.2 No 213 Class I Division 2 Group C 73/23/EEC 92/31/EEC CSA C22.2 No 213 Class I Division 2 Group D
Product certifications	ABS RMRS DNV RINA BV GL LR
Ambient air temperature for operation	32...140 °F (0...60 °C)
Ambient air temperature for storage	-13...158 °F (-25...70 °C)
Relative humidity	10...95 % without condensation for operation 5...95 % without condensation for storage
Operating altitude	0...6561.68 ft (0...2000 m)
Protective treatment	Conformal coating Humiseal 1A33 TC
IP degree of protection	IP20
Pollution degree	2

Ordering and shipping details

Category	22558 - TSX PREMIUM, ATRIUM & PL7 PRO
Discount Schedule	PC22
Nbr. of units in pkg.	1
Package weight(Lbs)	6.610000000000003
Returnability	N
Country of origin	FR

Offer Sustainability


Sustainable offer status	Not Green Premium product
RoHS (date code: YYWW)	Compliant - since 0829 - Schneider Electric declaration of conformity Schneider Electric declaration of conformity
REACH	Reference not containing SVHC above the threshold Reference not containing SVHC above the threshold
Product end of life instructions	Need no specific recycling operations

Contractual warranty

Warranty period	18 months
-----------------	-----------

Standard and Extendable Racks for Modules Mounting


Dimensions of Modules and Racks

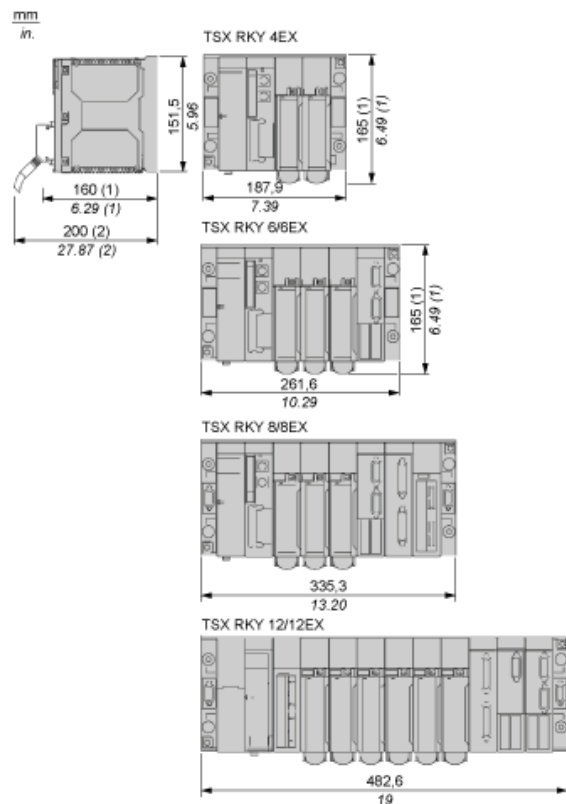

- (1) With screw terminal block modules.
- (2) Maximum depth for all types of modules and their associated connectors.

24 Vdc Discrete Input 16-Channel Module

Wiring Diagram

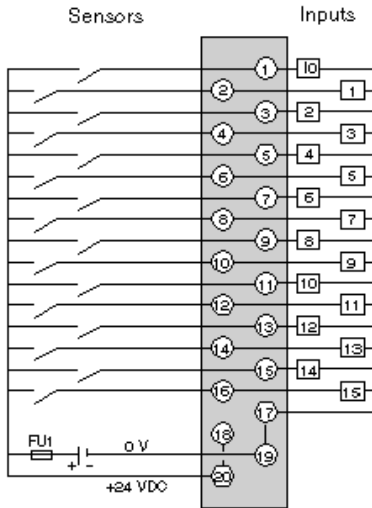

FU1 0.5 A quick-blow fuse